

LB - KB

DELTA series absolute filters for duct flows

Product	LB	KB
MPPS efficiency *	99,95 %	99,95 %
CEN EN 1822 classification	H 13	H 13
Suggested final pressure drop	600 Pa	600 Pa
Maximum pressure drop	1000 Pa	1000 Pa
Maximum operating temperature	90 °C	100 °C
Maximum relative humidity	90 %	100 %

* Average efficiency. Punctual efficiency has an admitted penetration rate 5 times higher.

LB-KB Delta absolute filters are deep pleated, with top quality construction, limited pressure drop, high dust holding capacities, strong mechanical resistance and are long-lasting. These filters are made of two materials different from the one used for the frame: MDF wood (LB) and galvanized steel (KB). Both have a special single piece gasket. They come in two different depths: 149 and 292 mm which allow face air speeds of 0.75 and 1.5 m/s respectively. All the filters are tested individually and labeled to assure the compliance with the measured features.

Applications LB and KB filters can be used in various applications:

- final stage of air treatment units for rooms with cleanliness class M4 and M5 (FS 290E)
- protection stage for very high efficiency filters (ULPA)
- in Canister systems to assure the required emission levels of exhausted air
- in line in Modulo systems to improve the efficiency of filtration systems
- in DIF.K/DIF.S terminal hoods in controlled contamination rooms.

Installation No matter what is the installation position, LB and KB filters always allow for the use of the entire filtration surface. We suggest installing the proper high-efficiency pre-filters to increase their operating life. On request we also supply frames and housings to improve and simplify the installation of the filters. Models LB can be burned completely.


Type	Sizes (mm)					Nominal air flow rate Q.				Filtering surface m ²		Initial pressure drop Pa
	LB		KB			LB	KB	LB	KB	LB	KB	
KB	A	B	C			m ³ /h		m ³ /sx10 ⁻³ *				
31	305	x 305	x 292			500	550	139	153	4,7	4,9	250
53	457	x 457	x 292			1200	1320	333	366	10,4	10,9	250
52	305	x 610	x 292			1000	1100	278	306	9,3	9,7	250
5	610	x 610	x 292			2000	2200	555	612	19	20	250
6	762	x 610	x 292			2500	2750	694	764	23,5	25	250
55	289	x 595	x 292			950	-	264	-	8,8	-	250
54	595	x 595	x 292			1900	-	528	-	18,2	-	250
3	305	x 305	x 149			270	-	75	-	2,2	-	250
43	457	x 457	x 149			620	-	172	-	5	-	250
42	305	x 610	x 149			550	600	153	166	4,5	4,7	250
4	610	x 610	x 149			1080	1190	300	330	9,5	9,8	250

*1 m³/s x 10⁻³ = 1 l/s

- Product ready in STOCK



Size

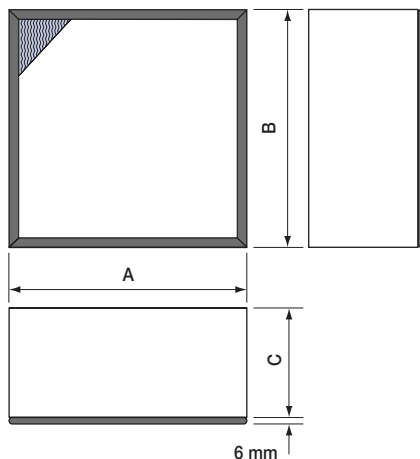

Typical curves

